

Local Signatures Installation Overview

Single mail server




Crossware Mail Signature installed on Mail Server.
Local Signatures are generated for users on the mail server.

E.g Program document to issue the following command:-

Load esig client checkallgroups

Multiple mail servers

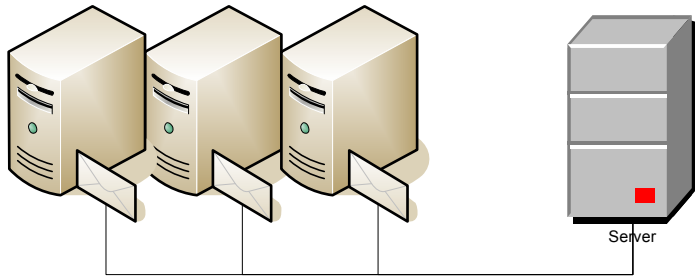


Crossware Mail Signature installed on separate server.
Local Signatures are generated for users on multiple mail servers.

E.g Program document to issue the following command:-

Load esig client checkallgroups

Multiple mail servers in multiple regions

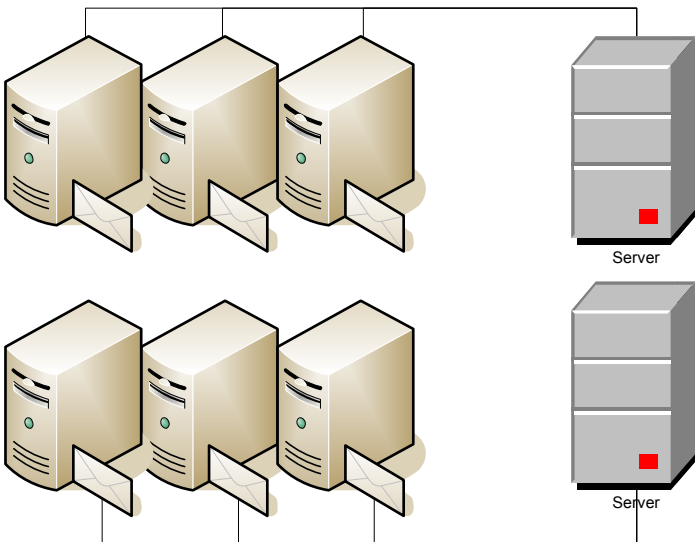

Crossware Mail Signature installed on multiple servers in different regions.
Local Signatures are generated for users on multiple mail servers but only the users in their own region.

This is achieved by restricting which Local Signature configuration checks are performed on which server

E,g Region 1 server has a program document to run the following command

Load esig client checkgroup Region1Configuration

'Region1Configuration' contains an address book group containing only 'Region 1' users.